



## Alulux CD 200 Ultra

Double walled roll formed aluminum profile with CFC free polyurethane *Ultra hard* foam core. Multiple stove enamel coating on polyester resin with structural finish.



### Specifications:

|                               |                     |
|-------------------------------|---------------------|
| Nominal Thickness             | 14 mm               |
| Surface area (exposed height) | 55 mm               |
| Weight per square meter       | 7.7 kg              |
| Maximum size                  | 12.0 m <sup>2</sup> |
| Slats per meter               | 18                  |

### Box size is determined by Guiderail height


|        |              |
|--------|--------------|
| 165 mm | 0 - 90 cm    |
| 180 mm | 91 - 120 cm  |
| 205 mm | 121 - 160 cm |
| 250 mm | 161 - 300 cm |
| 300 mm | 301 + cm     |

Curtain Colors: alumetalic


Box/Guiderail Colors: white, brown, alumetalic, beige

### Extruded Aluminum Guiderails


UPH 140

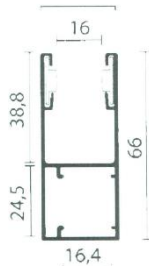


UPH 240

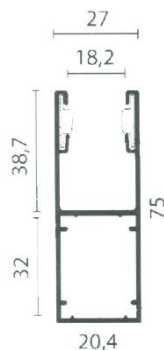

UPH 260

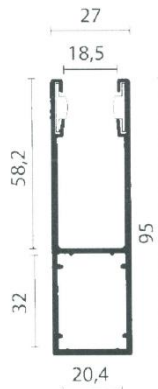

UPH 250/RD

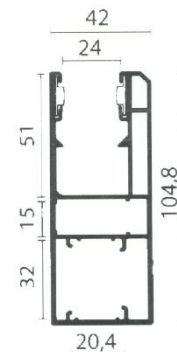

Warm in Winter

Cool in Summer  
rollshutter.ca

Security all Year Long